HALF HEIGHT TURNSTILES

Harby Half Height Turnstile

A slimline stainless steel tripod turnstile for reception areas, offices and leisure sites that need secure access with a smart finish.

Product code **55147059** | Units **Active or dummy end** | Use **Internal, or external under cover**



20–40
people per minute

IPX4
splash resistant from any direction

9 modes
of passage, from verified to free

Drop arm
emergency release for free exit

Overview

A half height tripod turnstile that combines security with a clean, professional look, suited to corporate receptions, offices, gyms, schools and visitor attractions. The slimline stainless steel housing has polished stainless steel arms.

A centrally mounted LED indicator shows red or green, with matching colours at each end. The unit has mounting points for one or two CCTV cameras or facial readers, and the arms drop away in an emergency for unrestricted exit, which can be linked to your fire alarm.

Key features

- **Stainless steel housing** with polished stainless steel arms
- **LED red and green** indication panels
- **Nine passage modes,** including verified, no entry and free passage
- **Sound and light prompts** with adjustable volume
- **Emergency drop arm,** can be linked to the fire alarm
- **Dummy end units** available to build multi-lane runs

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

Specification

Product code	55147059
Construction	
Housing	Stainless steel, slimline design
Arms	Polished stainless steel
Indicators	LED red and green panels, centrally mounted with matching end indicators
Camera mounts	One or two mounting points for CCTV cameras or facial readers
Operation	
Passage modes	Nine, including identity verification, no passing and free passing
Prompts	Sound and light, adjustable volume
Emergency	Arms drop away for unrestricted passage; can be linked to a fire alarm
Power failure	Fail safe
Throughput	20 to 40 people per minute
Size and weight	
Size, arm folded H × W × D (mm)	980 × 200 × 1200
Size, arm straight H × W × D (mm)	980 × 750 × 1200
Passage width	565 to 595 mm
Weight	60 kg
Electrical	
Input	24 V
Maximum operating current	6.5 A
Environment	
Ingress protection	IPX4, suitable for external use under cover
Operating temperature	-25°C to +70°C
Relative humidity	Up to 80%
Options	
Units	Active turnstile, or dummy end unit for multi-lane runs

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

How it works

Verify. A card, QR code or facial reader confirms the person, the indicator turns green and the tripod releases for one passage.

Choose a mode. Nine passage modes let you set verified entry, free passage or no passage for each direction.


Free exit. In an emergency the arms drop away, and the unit fails safe if the power is lost.

Planning the entrance

Each lane needs one active turnstile. For several lanes side by side, add dummy end units so every lane has a cabinet on both sides.

Rated IPX4, it can be used outdoors under a canopy or cover, and it suits sites with a wide temperature range.

Allow a passage width of 565 to 595 mm per lane. For wheelchairs and pushchairs, add a wider pass gate alongside.

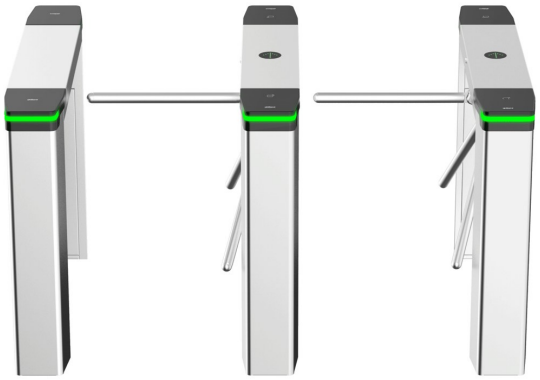

Front view of a two-lane run, showing the tripod arms and LED indicators.

Talk to someone who sells this every day

Tell us about your reception or entrance and how many lanes you need, and we will help you plan the layout.

Call 0116 318 4182

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online