
TELESCOPIC BOLLARDS

Lift Assisted Telescopic Bollard – 900 mm

A telescopic bollard, 900 mm above ground when raised, that lowers fully into the ground when vehicles need access.

Product code **52226716** | Height **900 mm raised**

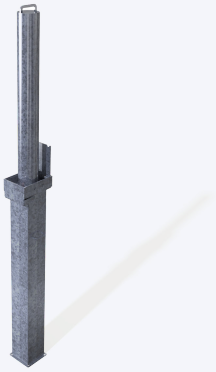

900 mm
raised height

114–193
diameters, mm

Flush
lid when lowered

Lift assist
gas spring

Overview

A telescopic bollard that gives a robust way to protect premises and vehicles. It is raised and lowered vertically, standing 900 mm above ground when up and sitting fully below ground when down, covered by its integral lid.

When raised it is secured with an integral high-security 7-pin push-button lock. A built-in gas spring lift assist takes the weight of the post, so it is easy to raise and lowers gently. It is ideal for vehicle forecourts, commercial premises, car parks and domestic driveways.

Key features

- **Telescopic** lowers fully below ground
- **Lift assist** gas spring takes the weight
- **Integral lid** leaves the surface flush when down
- **High-security lock** 7-pin push button, key supplied
- **4 sizes** from 114 to 193 mm
- **Galvanised steel** with colour coating options

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

Specification

Product code	52226716
Dimensions	
Height above ground (raised)	900 mm
Sizes	114, 139, 168, 193 mm diameter
Wall thickness	3 mm steel, 2 mm stainless steel
Finish	
Material	Galvanised steel
Options	304 brushed stainless steel (114–168 mm); hot-dip galvanised; or galvanised and powder coated
Operation	
Type	Telescopic, raised and lowered vertically with gas spring lift assist
Lock	Integral high-security 7-pin push-button lock, key supplied
Lid	Integral lid covers the socket when lowered
Keys	2 supplied; keyed alike available on multiple orders
Lid	Flush 6 mm galvanised lid
Outer casing	3 mm mild steel

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

How it works

To raise. Unlock with the key, twist, and the gas spring helps lift the post into place. Twist again and push the lock down to secure it.

To lower. Unlock it and the gas spring supports the post as it lowers gently into the ground, cushioned at the base.

Where it is used

Vehicle forecourts, commercial premises, car parks, private roads and domestic driveways.

Matches our fixed and removable bollards for mixed runs.



Lift assisted telescopic bollards protecting parking bays.

Talk to someone who sells this every day

Tell us about your site and what you need to protect, and we will help you choose the right bollards.

Call 0116 318 4182

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online