
RISING BOLLARDS

Manual Gas Rising Bollard – 500 mm

A key-operated, gas-assisted rising bollard with an LED light crown, for controlling vehicle access with no motor or wiring to the shaft.

Product code **38407496** | Size **500 × Ø219 mm**

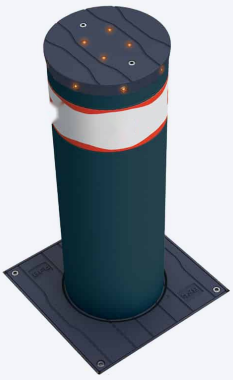

500 mm	Ø219 mm	LED crown	Key
raised height	shaft diameter	for visibility	operated, no motor

Overview

A manual rising bollard for efficient control of road access, with a quick and simple action. It suits car parks, private roads, residential sites and wide passageways.

Release it with the key and push it down, and it locks itself in the lowered position. The gas spring helps it rise again. It can be used alongside fixed and automatic bollards in mixed set-ups, and an LED light crown improves visibility at night.

Key features

- **Key operated:** release with the key and push down to lower
- **Gas-spring assisted** rise, with automatic locking at the top
- **No power needed** ideal where there is no supply on site
- **Locks down** flush with the ground when lowered
- **LED light crown** for visibility in low light
- **Grey or stainless** finish

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

Specification

Product code	38407496
Dimensions	
Raised height	500 mm
Shaft diameter	219 mm
Shaft wall	5 mm steel
Operation	
Type	Manual, gas-spring assisted rising bollard
Lowering	Release with key, push down; locks in the lowered position
Raising	Release with key; gas spring assists the rise and it locks when up
Power	No power needed to operate
Light crown	
LED crown	Integrated LED light crown
Supply	Needs our LED light crown power supply (sold separately)
Finish	
Options	Painted steel in RAL 7015 grey, or stainless steel

Also available 700 mm high. Fixed bollards in the same style are available for mixed set-ups.

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

How it works

To lower. Release the lock with the key and push the bollard down. It locks in the lowered position so vehicles can pass.

To raise. Release it with the key and the gas spring lifts it with very little effort. It locks automatically at full height.

Mixed set-ups

Use gas rising bollards alongside fixed bollards in the same style to close off a wide opening, while keeping one or two lanes that can be opened when needed.

Ideal for councils, car parks, residential sites and facility managers.



Stainless steel finish with LED light crown.

Talk to someone who sells this every day

Tell us about your entrance and how often it opens, and we will help you choose the right bollards.

Call 0116 318 4182

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online