REMOVABLE BOLLARDS

Removable Galvanised Steel Bollard – 750 mm

A removable galvanised steel bollard, 750 mm above ground, that lifts out of a ground socket when you need vehicle access.

Product code **73316988**

Height **750 mm above ground**



750 mm	60–193	Removable	Galvanised
above ground	diameters, mm	ground socket	mild steel

Overview

A removable steel bollard, 750 mm above ground, that gives the same strong protection as a fixed bollard but lifts out when access is needed. Steel will not shatter on impact, so it suits ram raid deterrence, protected parking and walkways.

It sits in a socket set into the ground. Lift it out to open the space and drop it back in to close it. It matches our fixed galvanised bollards so runs can mix fixed and removable posts.

Key features

- **Removable** from a ground socket
- **Galvanised mild steel** for long life
- **10 diameters** from 60 mm to 193 mm
- **Matches our fixed bollards** for mixed runs
- **Made to measure** heights, colours and diameters on request

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online

Specification

Product code	73316988
Dimensions	
Height above ground	750 mm
Diameters	60, 76, 90, 101, 114, 127, 139, 152, 168, 193 mm
3 mm wall	60, 76, 90, 101, 114, 127, 152 mm diameters
5 mm wall	139, 168, 193 mm diameters
Finish	
Material	Galvanised mild steel
Finish	Hot-dip galvanised
Options	
Fixing	Removable, in a ground socket
Bespoke	Other heights, colours, finishes and diameters made to order

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.


Scan to view online

Where it is used

Car park entrances, private roads, service yards, emergency access routes and pedestrian areas that need opening from time to time.

How it works

The bollard drops into a socket set in the ground. Lift it out to let vehicles through, then replace it to close the space again.

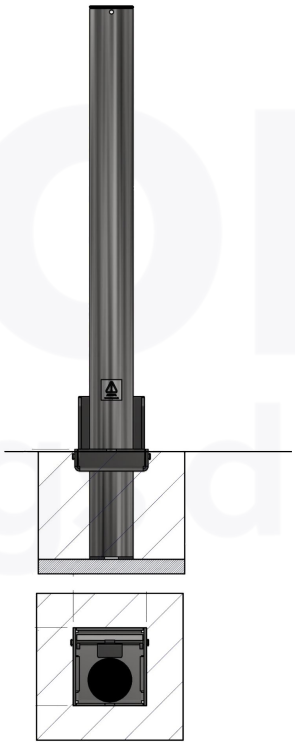

The bollard and its ground socket.

Talk to someone who sells this every day

Tell us about your site and what you need to protect, and we will help you choose the right bollards.

Call 0116 318 4182

Store Fittings Direct is a trading name of CHF Solutions Ltd, registered in England & Wales 12316756. Specification may change without notice. © 2026 Store Fittings Direct. Not to be copied or reproduced without permission.

Scan to view online